





6 W



Technical data	HSR161T
Load rating	6 W
Transformer tappings at 100V	6 W
Transformer tappings at 70V	6-3 W
Transformer tappings at 50V	6-3-1.5 W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker Ø and Impedance	3" / 8 ohms
Dimension Ø, Install depth	Ø97 (65)mm
Material, Colour	ABS , white

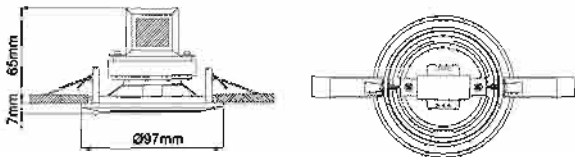


6 W

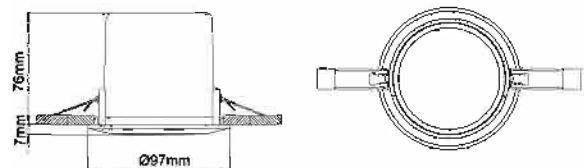

Technical data	HSR161TH
Load rating	6 W
Transformer tappings at 100V	6 W
Transformer tappings at 70V	6-3 W
Transformer tappings at 50V	6-3-1.5 W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker Ø and Impedance	3" / 8 ohms
Dimension Ø, Install depth	Ø97 (76)mm
Material, Colour	ABS , white




6 W

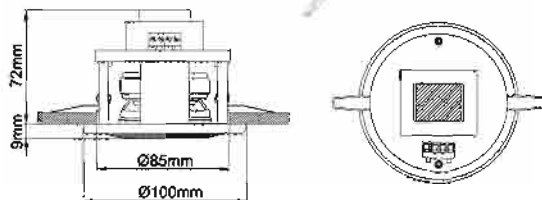

Technical data	HSR162T
Load rating	6 W
Transformer tappings at 100V	6 W
Transformer tappings at 70V	6-3 W
Transformer tappings at 50V	6-3-1.5 W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker Ø and Impedance	3" / 8 ohms
Dimension Ø, Install depth	Ø100 (72)mm
Material, Colour	ABS , white



3 W

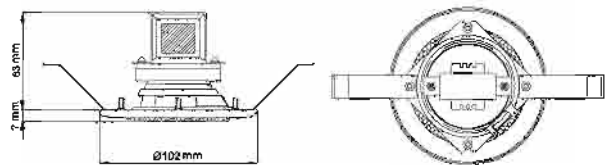

Technical data	HSR122T
Load rating	3 W
Transformer tappings at 100V	3 W
Transformer tappings at 70V	3-1.5 W
Transformer tappings at 50V	3-1.5-0.75 W
Frequency range	150-15KHz
SPL(@1W/m)	85dB
Speaker Ø and Impedance	3" / 8 ohms
Dimension Ø, Install depth	Ø102 (63)mm
Material, Colour	steel , white