



## Description

This cabinet speaker captivates by its remarkable innovative design. The symmetrical shape adapts to all premises in the best way. It can also be used as a ceiling speaker.

Whilst developing this speaker, we put great effort into the functionality and stability. Therefore it is offered in many variations, optionally moisture proof impregnated. Excellent playback quality and sound fidelity.

Please consider the following features:



- Easy assembly.

- Option moisture proof impregnated available.
- Available in all desired colours.
- Supplied with high-quality broadband chassis.

Models with inserted control:

These cabinet speakers are also available with an inserted volume control.

The control is laterally attached and is adjusted by turning the installed knob.

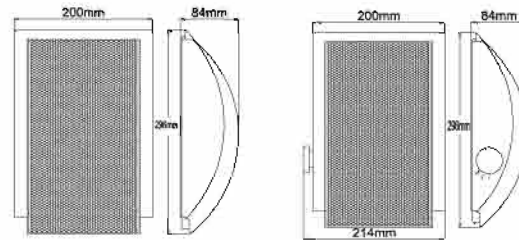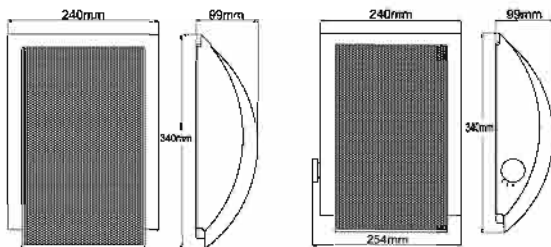

Technical data	HWR117T	HWR117T-A (with control)
Load rating at 100V	10 W	10 W
Transformer tapings	10-5-2.5 W (100V)	10-5-2.5-1.25 W (70.7V) 10-5-2.5 W (100V)
Frequency range	130-15KHz	130-15KHz
SPL(@1W/m)	92dB	92dB
Speaker Ø and Impedance	6 1/2" / 8 ohms	6 1/2" / 8 ohms
Dimension HxWxD(mm)	340x240x99mm	340x254x99mm
Material, Colour	ABS , white	ABS , white

Technical data	HWR118T	HWR118T-A (with control)
Load rating at 100V	6 W	6 W
Transformer tapings	6-3-1.5 W (100V)	6-3-1.5-0.75 W (70.7V) 6-3-1.5 W (100V)
Frequency range	150-17KHz	150-17KHz
SPL(@1W/m)	90dB	90dB
Speaker Ø and Impedance	5" / 8 ohms	5" / 8 ohms
Dimension HxWxD(mm)	296x200x84mm	296x214x84mm
Material, Colour	ABS , white	ABS , white